ΕN



1562

Elbow male/male



The brass generic fittings are suitable for domestic and commercial plumbing, industrial, agricultural application and generally with every non aggressive fluid.

TECHNICAL SPECIFICATIONS

Maximum temperature: 200 °C


Minimum temperature: - 20°C (provided that the fluid remains in the liquid phase)

Maximum operating pressure: 30 bar

Threads: male UNI ISO 228

CONSTRUCTION SPECIFICATIONS

Body: EN12165 brass

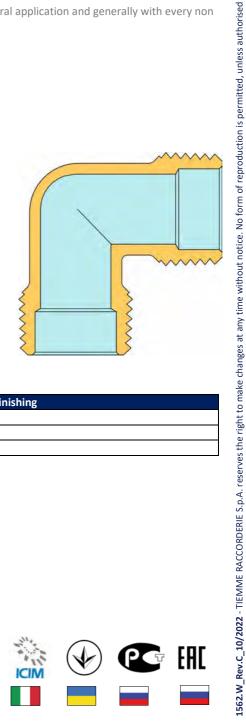

PRODUCTION RANGE

Art.	Code		Finishing	
1562	1500384	3/8"X3/8"	-	
	1500107	1/2"X1/2"	-	
	1500214	3/4"X3/4"	-	

CERTIFICATIONS





















































